

# Components & accessories



- Control panel extraction cycle
- Electrical system on the machine
- Hydraulic tilting movement
- Easy to assemble, use and placement

## REEL FILTER 90°

Total shaft width	max. 3.600 mm
Diameter shaft	max. ø 3.000 mm
Motor power	N° 1 A.C. 7 kW 4 poles 400 V 50/60 Hz
Hydraulic unit	with tank 55 Liter



- Control panel extraction cycle
- Electrical system on the machine
- 2 axes movement of the head extraction
- Hydraulic unit for hydraulic system
- Automatic self alignment with shaft head
- Easy to assemble, use and placement

## SHAFT EXTRACTOR


Total shaft width	max. 3.600 mm
Diameter shaft	max. ø 600mm
Motor power	N° 1 A.C. 3 kW 50/60 Hz
Hydraulic unit	with tank 20 Liter



- Control panel
- Electrical system
- Cam to distribute a carton cores
- Easy to assemble and placement

## CARTON CORE AUTOMATIC LOADING SYSTEM

Total length carton cores	max. 3.600 mm
Core Internal ø	to be required
Drives	pneumatic cylinders
Capacity	on request the customer

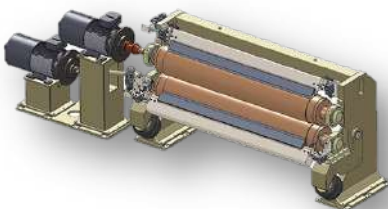

TYPE	Rolls diam. (mm)	Trim width (mm)	Speed (m/min)	Nip Value (Kg/cm)	Operation
SKEWING	400	up to 3.600	max. 1.500	up to 20	Pneumatic
	750	up to 5.600	max. 2.000	up to 20	Hydraulic
CROWN CONTROL	600	up to 5.600	max. 2.000	up to 20	Hydraulic